


Rigid Ducting

Round Ducting



RR 100/2m PVC
RR 125/2m PVC
RR 150/2m PVC



RB 100/45° PVC
RB 125/45° PVC
RB 150/45° PVC
RB 200/90° Metal



RB 100/90° PVC
RB 125/90° PVC
RB 150/90° PVC
RB 200/90° Metal



RRT 100 PVC
RRT 125 PVC
RRT 150 PVC
RRT 200 Metal

Rigid Ducting




RV 100 PVC
RV 125 PVC
RV 150 PVC
RV 200 Metal

Backdraft damper




RVK 125 PVC
RVK 150 PVC

Flat Ducting

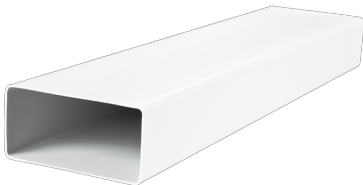

FK 204x60/2m PVC
FK 220x90/2m PVC



FKB 204x60 PVC
FKB 220x90 PVC




FKVU 204x60 PVC
FKVU 220x90 PVC

Rigid Ducting

Flat Ducting




FKT 204x60 PVC
FKT 220x90 PVC



US-90 100/204x60 PVC
US-90 125/204x60 PVC
US-90 150/204x60 PVC
US-90 150/220x90 PVC



FKW 204x60 PVC
FKW 220x90 PVC



FKWW 204x60 PVC
FKWW 220x90 PVC



UBS 125/204x60 PVC
UBS 150/220x90 PVC

Rigid Ducting

Flat Ducting



FKV 204x60 PVC
FKV 220x90 PVC

Reducers




RS 204-220 PVC



RS 125-100 PVC
RS 150-125 PVC
RS 200-150 PVC



R 125M-160F Metal
R 150M-160M Metal
R 150M-160F Metal
R 150M-200F Metal
R 180M-200F Metal



R 125F-075F Metal
R 125F-090F Metal

Other Ducting and Accessories

Supply & Extract Valves

OPF 125/150 Extract Valve



OPT 125 Valve Supply



VPD 125 Valves




DucoVent Premium Trim 125



Fire Rated Extract



Fire Rated Supply

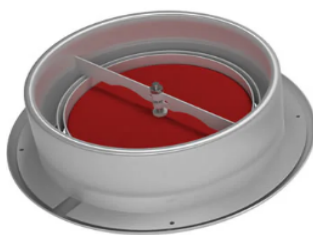

EG-WHM 100 AC Acoustic Wall Vent

WALL VENT


Features

- For the mounting in external wall in the room
 - Provides steady fresh air intake
 - Closed 47db - Open 42db
 - Manual adjustment of effective cross section Easy
 - maintenance
 - Equivalent area 2,859mm²
- Note: G3 filter must be removed to use the acoustic version




Modifications

Decor – with external white grilles.
Decor – with external colour grilles available upon request.

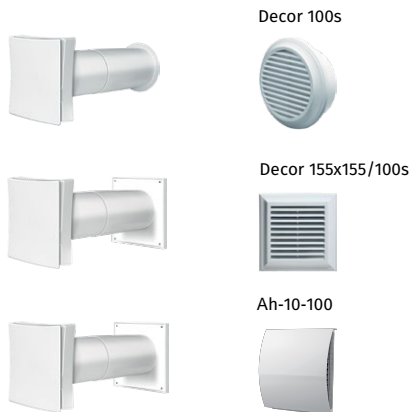


Overall dimensions [mm] and mounting

Internal grille

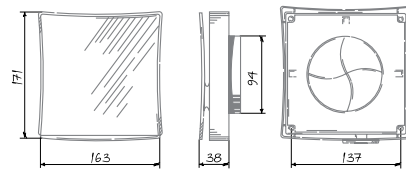


External grille (plastic)

Square external grille



Round external grille



Technical data


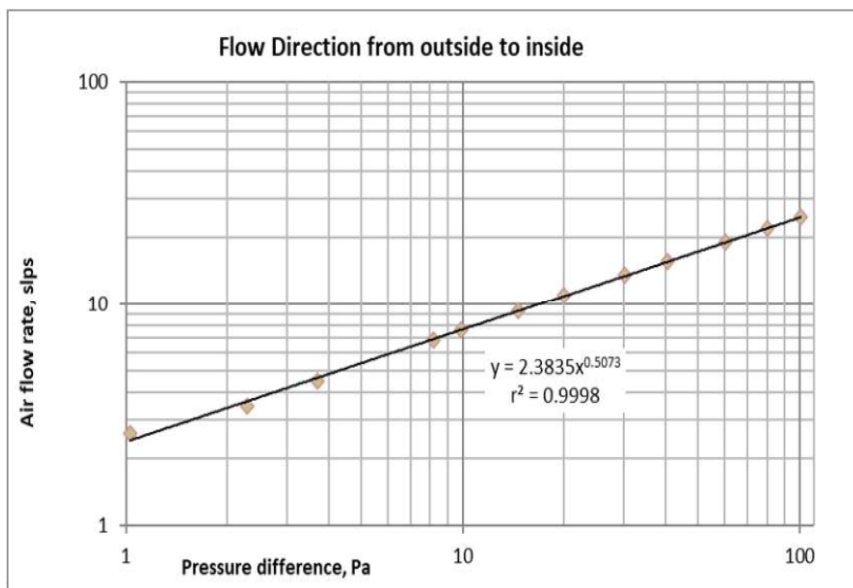


Figure 5 Measured air flow and pressure data for air flow from outside to inside corrected to STP.

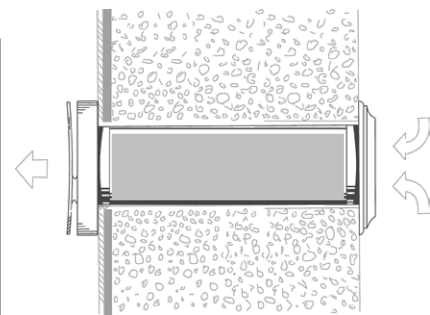

WHM

WALL VENT


Features

- For the mounting in external wall in the room
- Provides steady fresh air intake
- Supplied with a dust G3 filter
- Manual adjustment of effective cross section Easy maintenance
- Equivalent area 3580 mm²




Modifications

Decor – with external white grilles.
Decor – with external colour grilles available upon request.

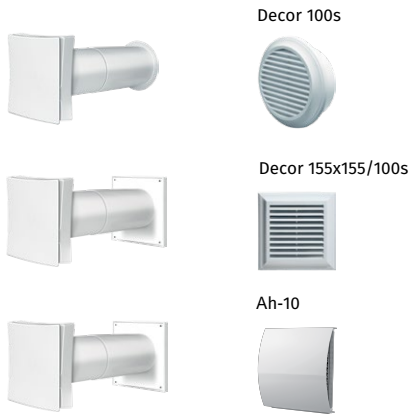


Overall dimensions [mm] and mounting

Internal grille


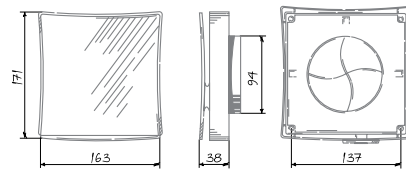


External grille (plastic)

Telescopic duct (sold separately)

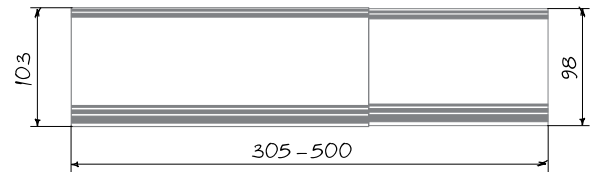

Technical data

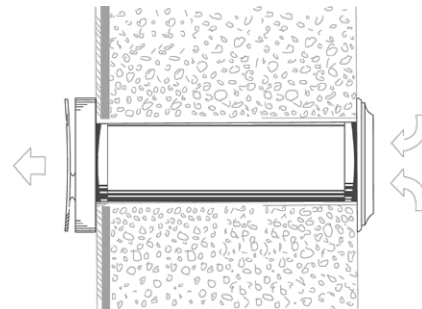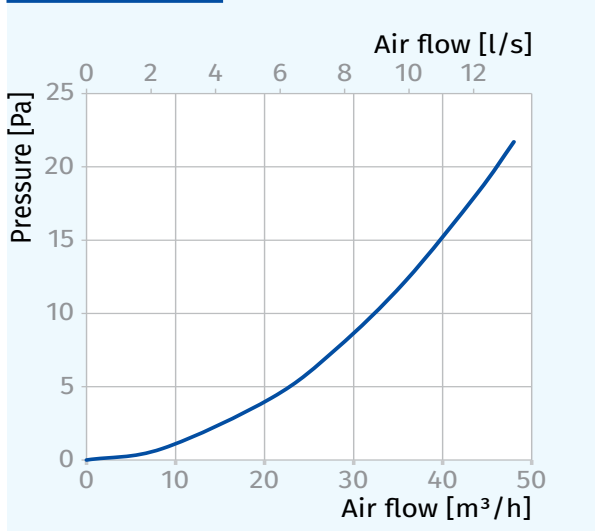

Acoustic Wall Vents

Duco Silenzio



→ Ventilation- and sound reduction performance

Type	Airflow (Q) in l/s/m at...			Airflow (Q) in m³/h/m at...			Equivalent area at 1 Pa in mm²/m	Geometrical Free Area in mm²/m	Sound absorption $D_{n,e}, W(C;C_{tr})'$ in dB	
	1 Pa	2 Pa	10 Pa	1 Pa	2 Pa	10 Pa			OPEN position	CLOSED position
Silenzio SR	16,6	16,5	16,4	59,8	59,4	59,1	21060	17600	39 [-1;-4]	50 [-2;-5]
Silenzio SR AK	9,0	10,1	10,3	32,4	36,4	37,1	11478	17600	48 [-1;-4]	61 [-1;-6]
Silenzio Retro SR ** without Duco outside cap	10,7**	15,2	10,1	38,5	54,7	36,4	13616	17600	43 [-1;-3]	64 [-3;-10]
Silenzio Retro SR with Duco outside cap	9,0	12,9	10,1	32,4	46,5	36,4	11453	11500	43 [-1;-3]	64 [-3;-10]

* According to EN ISO 717

** Measured without outside cap. Effective values depend on the outside part.

⚠ We do not guarantee that our products will be compatible with another company's products!

Wall Cowls

Wall Cowl 150mm \emptyset and 200mm \emptyset

Black or White




Wall Cowl 100mm, 125mm and 150mm \emptyset White

Different colors available upon request



External Grilles

Adapt-Air 6500

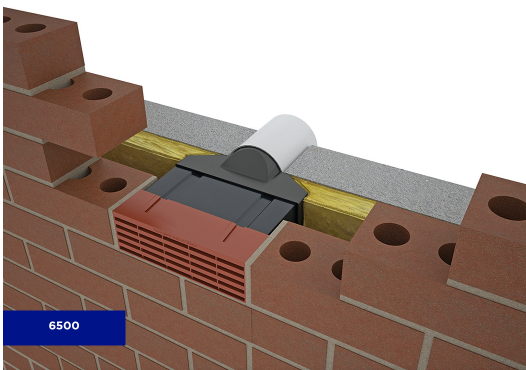

VKC5733



Decor s
Available 100mm, 125mm
colour upon request



Decor 155x155
Available 100mm, 125mm, 150mm
colour upon request



Roof Cowls

Roof Cowl Condron
125/150mm Ø with Adaptor



Roof Cowl Universal
125/150mm Ø with Adaptor



Roof Cowl Slate Grey
125/150mm Ø with Adaptor



Roof Cowl
200mm Ø



Flat Roof Cowls



Versions

160mm

200mm

Flexible Insulated Ducting

Flexible Ducting
Iso250 10m 127/152/203mm Ø



Silencers

Sonoec DST 127/0.5



Flexible Silencer Sonodec
Non-Woven TRD25



160mm Ø
203mm Ø

⚠ We do not guarantee that our products will be compatible with another company's products!

Ducting Accessories


Temporary air sealing tape



ASB7050



Foil Tape 75mm

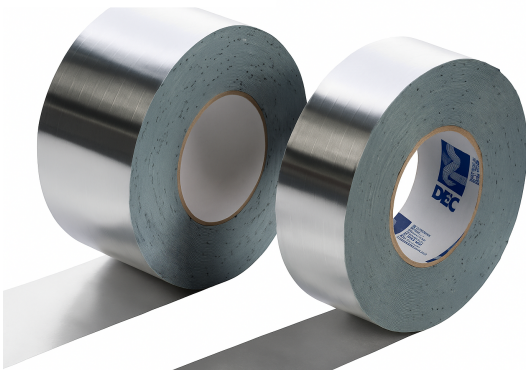

Duct Sealant



25mm Foil Back insulation



⚠ We do not guarantee that our products will be compatible with another company's products!