


PRODUCT DATA SHEET

VKC5733G

DOUBLE AIRBRICK ADAPTOR C/W GRILLES

- W** RAL9010
- B** RAL8017
- BE** RAL1001
- T** RAL2001

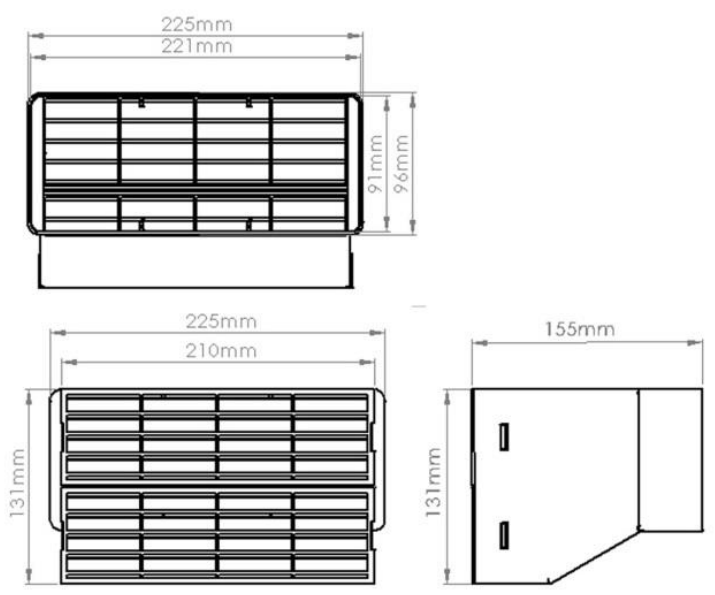

SPECIFICATION DETAILS

The VKC5733G 220x90mm Rectangular Double Airbrick Adaptor with Grilles is manufactured from (white) High Impact Polystyrene and has a minimum free area of 15,360mm². It has a female adaptor for connection outside of the System 220 duct.


The VKC5733G is fully compliant with SAP Appendix Q Product Characteristics Database recommendations for duct sizes used with both extract and Mechanical Heat Recovery Systems.

VKC5733G is manufactured in compliance with Domestic Plastic Ductwork Specification DW/154 and does meet UL94HB flammability standard.

VKC5733G has been designed for use with Verplas System 220.

MAX/MIN OPERATING TEMPERATURES	+ 60°C to - 15°C
---------------------------------------	-------------------------

PERFORMANCE CURVE

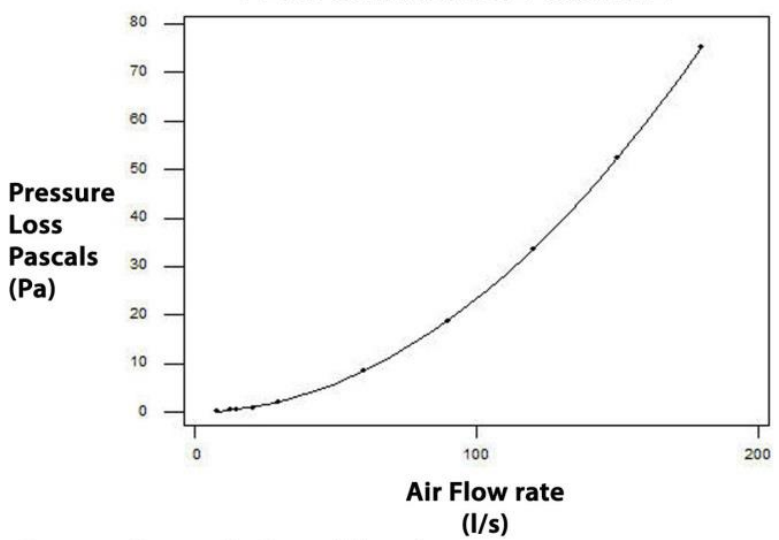

AIRFLOW	RESISTANCE
8 l/s	0.31 pa
13 l/s	0.60 pa
21 l/s	1.08 pa
30 l/s	2.20 pa
60 l/s	8.50 pa
120 l/s	33.70 pa