



Adapt-Air

Simple to install pre-assembled sets, which quickly and conveniently adapts extraction ductwork to terminate at a standard plastic airbrick.

Use

At:


- Floor level voids
- External walls

Suitable for round and rectangular rigid extraction ductwork from:


- Bathrooms
- WC cloakrooms
- Utility rooms
- Kitchens

Features and benefits

- Enables rigid extraction ductwork termination to be built in as part of the brickwork package
- Doesn't restrict or interrupt ducting airflow
- Convenient '1 product code' assembled kits for immediate installation
- Eliminates the requirement for retrospective through wall core drilling
- Enables 1st fix ceiling & wall duct extraction and wall connections to outlet vent
- Durable and totally resistant to decay
- Airbricks available in terracotta and buff to blend with various brick types (other colours available on request)
- Suitable for working temperatures of -20 to 60°C

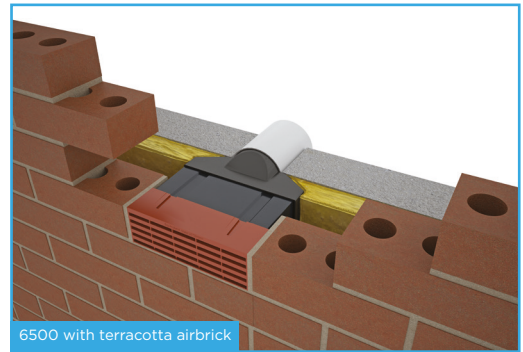

6500 with terracotta airbrick

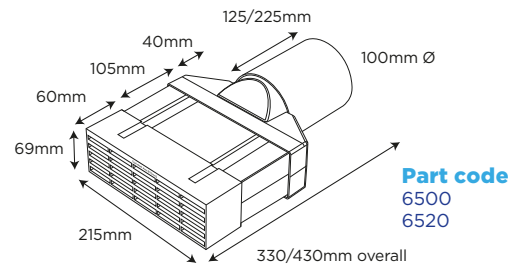

6500 ADAPT-AIR single airbrick

100mm diam tube (110mm adaptor)

6500, 6520 & 3511 airflow

m ³ /h	Pa	L/s
55	10	15.28
68	15	18.89
88	25	24.44
124	50	34.44
177	100	49.17

6500, 6520 & 3511 vent airflow volume

